

DUCHESNE COUNTY MONUMENT SURVEY RECORD



T1S R1W

SEC 9 + SEC 10


1/16

U.S.B.&M.

U-13



SCALE: 1"=30'

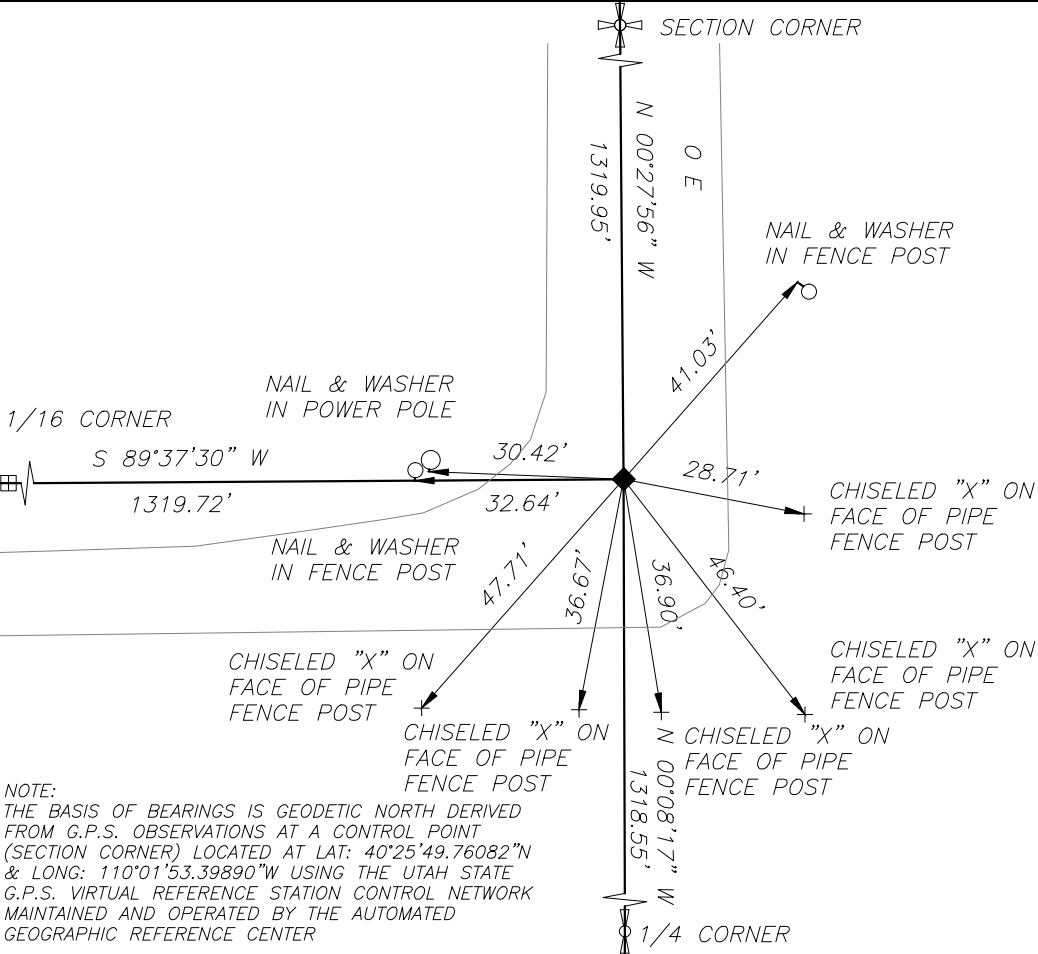

NOTE:  
 THE BASIS OF BEARINGS IS GEODETIC NORTH DERIVED FROM G.P.S. OBSERVATIONS AT A CONTROL POINT (SECTION CORNER) LOCATED AT LAT: 40°25'49.76082"N & LONG: 110°01'53.39890"W USING THE UTAH STATE G.P.S. VIRTUAL REFERENCE STATION CONTROL NETWORK MAINTAINED AND OPERATED BY THE AUTOMATED GEOGRAPHIC REFERENCE CENTER

DESCRIPTION OF CORNER EVIDENCE FOUND

POSITION OF CORNER WAS DETERMINED BY PROPORTIONATE MEASEMENT

DESCRIPTION OF MONUMENT AND ACCESSORIES ESTABLISHED TO PERPETUATE THE ORIGINAL LOCATION OF THE CORNER

SET A 5/8" X 24" REBAR WITH A 1½" ALUMINUM CAP IN THE MIDDLE OF A COUNTY ROAD

REFERENCED AS SHOWN

STATE PLANE COORDINATE DATA  
 (U.S. SURVEY FEET)  
 NAD 83 UTAH CENTRAL ZONE  
 N: 7323245.65  
 E: 2060275.46

LATITUDE: 40°24'52.12556" N  
 LONGITUDE: 109°59'31.46643" W  
 PUBLIC LAND SURVEY SYSTEM GCDB ID NO. UT300010S0010W0\_400560

CERTIFICATION

I Jerry D. Allred, Professional Land Surveyor, State of Utah, do hereby certify that I have performed or reviewed the work done on the diagrammed corner as reported on this recordation form and approve same

Date 16 JUN '17

Jerry D. Allred, Professional Land Surveyor  
 Certificate No. 148951  
 Duchesne County Surveyor

